

Shenzhen Bede Mold CO.,Ltd


深圳市贝得科技有限公司

Factory Address:98 Industrial Area,Zhongxin Rd.,Xinqiao Street,Bao'an District, Shenzhen, China
Office Phone:+8675527084976 Mobile:+8615989309421 Email:kerrykim@szbede.com contact: kerry kim

Hex Head Setscrews ISO 4017 (DIN 933)

Commonly referred to as a setscrew or simply as a bolt. The fully threaded ISO 4017 or DIN 933 should not be confused with it's DIN 931 equivalent. A standard spanner or ratchet is typically used to fit this product. Used for decades on all types of assembly throughout the world. As with the DIN 931 hex bolt, the hex drive allows a higher torque to be applied.

d	tpi	k max.	s	e
M2	0.40	1.4	4	4.32
M2.5	0.45	1.7	5	5.45
M3	0.50	2.0	5.5	6.01
M4	0.70	2.8	7	7.66
M5	0.80	3.5	8	8.79
M6	1.00	4.0	10	11.05
M7	1.00	4.8	11	12.12
M8	1.25	5.3	13	14.38
M10	1.50	6.4	16(17)	18.90
M12	1.75	7.5	18(19)	21.1
M14	2.00	8.8	21(22)	24.49
M16	2.00	10	24	26.75
M18	2.50	11.5	27	30.14
M20	2.50	12.5	30	33.53
M22	2.50	14.0	32	35.72
M24	3.00	15.0	36	39.98
M27	3.00	17.0	41	45.20
M30	3.50	18.7	46	50.85
M33	3.50	21.0	50	55.37
M36	4.00	22.5	55	60.79
M39	4.00	25.0	60	66.44
M42	4.50	26.0	65	71.3
M48	5.00	30.0	75	82.6

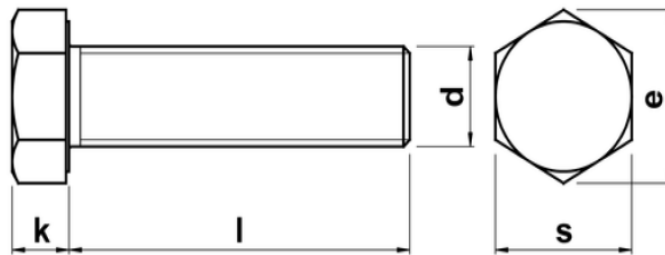

Contact: whatsapp +8615915396878
Email kerrykim@szbede.com
website: www.precisionmoldcomponents.com

